


Flat Jack

Flat Jacks provide in-situ testing of stresses within masonry structures or rock



Flat Jack

Overview

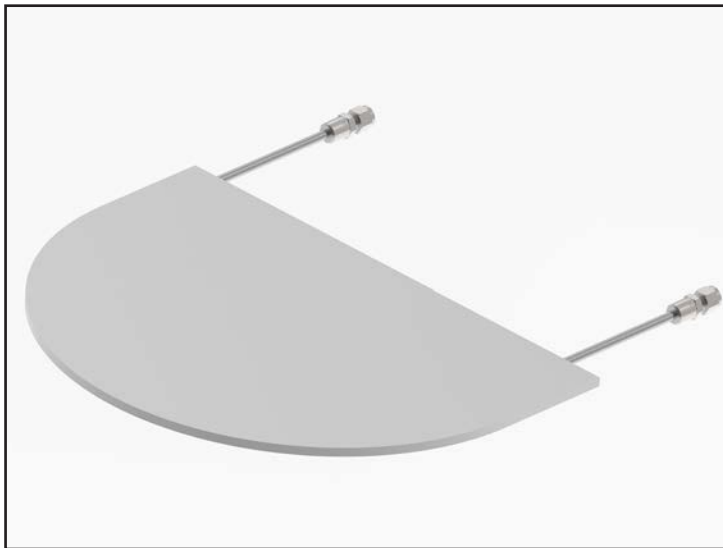

Flat jacks are designed to carry out in-situ testing of masonry structures and rock.

The flat jack is constructed from two stainless steel plates welded around their periphery, with the narrow gap between the plates filled with hydraulic fluid. It is inserted into a slot cut into the structure to be monitored and gradually brought up to pressure with a special hydraulic pump.

As stress increases within the structure or rock, the fluid pressure within the cell rises as the plates are squeezed together and it is possible to derive the stresses acting in the structure test area.

A length of stainless steel tube connects the plates to a pressure transducer (VWDT 5000 or SGT 3000) that converts the pressure to an electrical signal which can be read directly with a MP12 readout or data logged.

APPLICATIONS

Measurement of in situ stress

Evaluation of the mechanical properties of concrete and rock masses

Monitoring of variations in the stress state

Restoration of monuments and historical buildings

Sheet piles

Tunnel lining

Fills & embankments

Mine backfilling

Rail track

FEATURES

Robust and reliable

Available in various sizes


Possibility of automatic monitoring

Flat Jack

Specifications

FLAT JACK

Material	Steel		
Thickness	4mm		
Max operating pressure	60 bar		
Exterior finish	Painted		
Standard dimensions	Semi-circular	B: 350mm	A: 175mm C: 0mm r: 175mm
	Semi-circular	B: 325mm	A: 120mm C: 0mm r: 120mm
	Semi-oval	B: 350mm	A: 260mm C: 85mm r: 175mm
	Rectangular	400mm x 200mm	

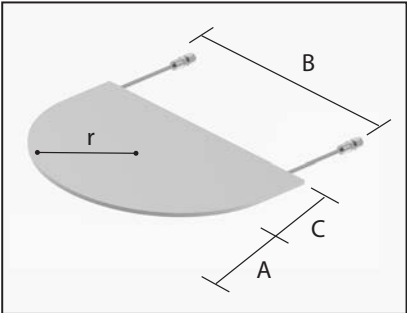

The diagram shows a semi-circular flat jack with dimensions labeled: A is the width of the flat base, B is the length of the curved top, C is the thickness, and r is the radius of the curved top.


PRESSURE TRANSDUCER

Type	Vibrating wire, piezoresistive
Material	Stainless steel
Pressure fitting	Swage lock type
Output	Frequency, 4-20 mA
Measuring range	1-2-5-10 bar (others on request)
Total accuracy	<0.5% FS (others on request)
Operating temperature	-20 to +75 ° C

HYDRAULIC PRESSURE PUMP

Hand pump	Includes 100 bar pressure gauge & T-fitting
Connection kit	Includes ball valve & nylon tube



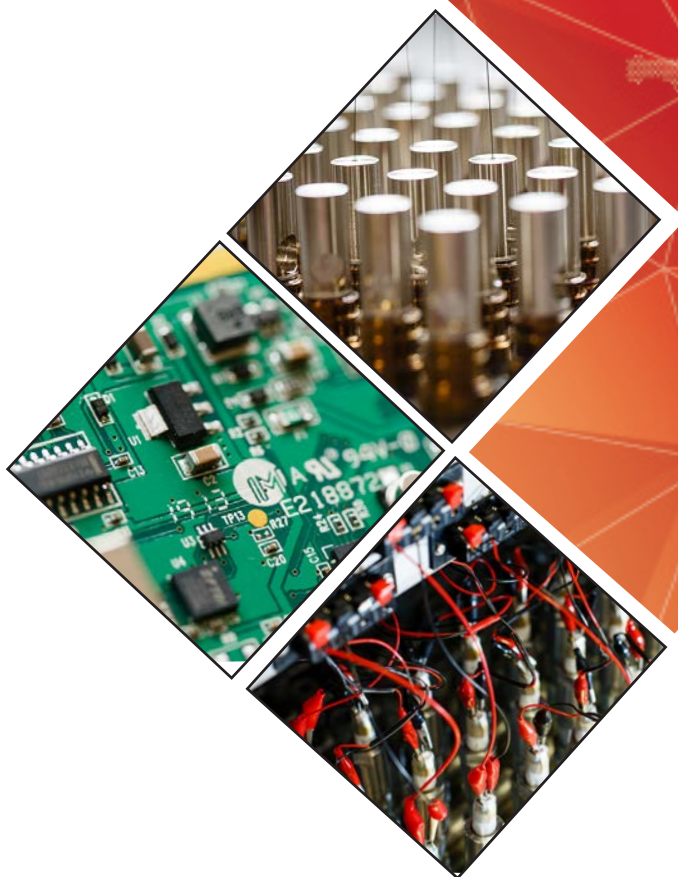

Geosense Ltd, Nova House, Rougham Industrial Estate, Rougham, Bury St Edmunds, Suffolk IP30 9ND, England

www.geosense.co.uk e sales@geosense.co.uk t +44(0)1359 270457