


AC-23 / AC-22 / AC-21 Accelerometer

Features

- ❑ Full Scale $\pm 0.1, 0.2, 0.5, 1, 2$ and $4g$ jumper selectable
- ❑ Bandwidth 0.1 Hz to 100 Hz (optional 200 Hz)
- ❑ Dynamic range $> 125 \text{ dB}$
- ❑ Excellent temperature stability
- ❑ Strong-Motion, Free field and Industrial applications
- ❑ Downhole version (AC-23-DH) is also available
- ❑ Different housing and mounting options are available
- ❑ Single Bolt Mounted Enclosure provides up to $\pm 10^\circ$ of Levelling Adjustment

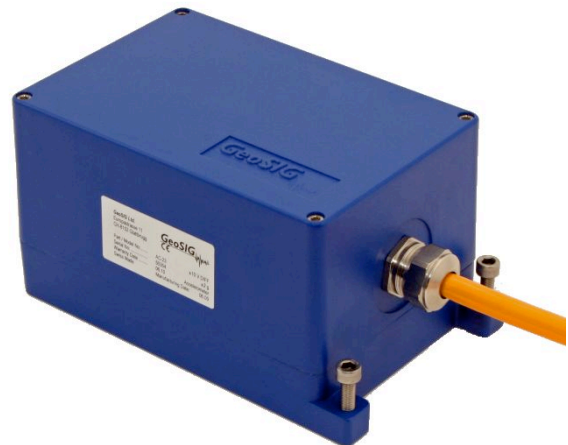

Outline

The AC-23 package is a triaxial accelerometer sensor designed for Strong Motion and industrial applications where a high sensitivity is required.

The AC-2x series are state-of-the-art servo-accelerometers based on standard exploration geophone mass-spring system with electronic feedback. Having remarkable temperature and aging stability because of the very simple principle, the AC-2x rarely requires maintenance.

The outstanding dynamic range performance and linearity of the AC-2x which is more than 125 dB at $\pm 2 g$ full scale within the 0.1 to 50 Hz range, makes this accelerometer a perfect sensor for many applications.

Triaxial, biaxial and uniaxial configurations are all available in surface and downhole models, complementing the versatile useability of the AC-2x.

The AC-2x is housed in a sealed cast aluminium housing with the dimensions of $195 \times 112 \times 96 \text{ mm}$. The housing also offers a single bolt mounting system with three levelling screws. Stainless steel housings as well as internal mounting inside GSR-xxAH housing options are available.

With the help of the TEST LINE the sensor can be easily and completely tested. Full scale is user selectable on site by setting the internal jumpers.

The AC-2x accelerometer is directly compatible with the GeoSIG recorders.

General Characteristics

Application: Strong Motion earthquake survey
Industrial applications requiring high sensitivity

Configurations:

AC-23 or AC-23i*:

AC-22-H or AC-22-Hi*:

AC-22-V or AC-22-Vi*:

AC-21-H or AC-21-Hi*:

AC-21-V or AC-21-Vi*:

	Triaxial	Biaxial	Uniaxial	Axes	Alignment**
AC-23 or AC-23i*	■			X – Y – Z	H – H – V
AC-22-H or AC-22-Hi*		■		X – Y	H – H
AC-22-V or AC-22-Vi*			■	X (or Y) – Z	H – V
AC-21-H or AC-21-Hi*				X (or Y)	H
AC-21-V or AC-21-Vi*				Z	V


* i : Internal sensor ** H: Horizontal, V: Vertical

Full Scale Range: Jumper selected in range
 ± 0.1 , ± 0.2 , ± 0.5 , ± 1 , ± 2 and 4g
for ± 10 V diff at output
AC-23 NPP: ± 0.5 , ± 1 and ± 2 g

Sensor Element

Type: Servo-accelerometer based on geophones with feedback
Dynamic Range: >125 dB effective at ± 2 g full scale
Linearity: 0.1 %
Accuracy: ± 0.4 dB max over the bandwidth
Cross Axis Sensitivity: 1 %
Bandwidth: 0.1 Hz (1 pole) to 100 Hz (1 pole)
optional 200 Hz
Damping: 0.7 critical
Offset Drift: < 1 mV/ $^{\circ}$ C
Span drift: < 200 ppm/ $^{\circ}$ C
Full Scale output: 0 ± 10 V differential (20 Vpp)
optional 2.5 ± 2.5 V single-ended (5 Vpp)
0 to 20 mA current loop

Measuring Range: See Plot

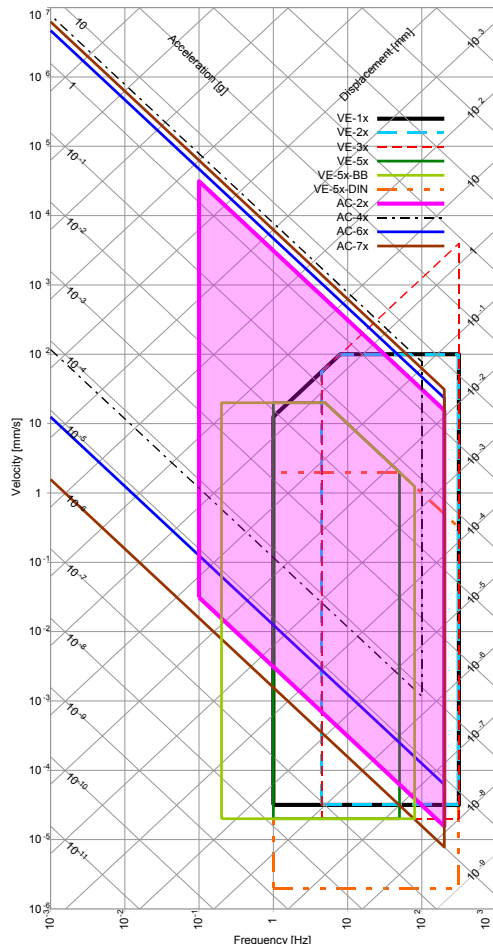

Power




Supply Voltage: 12 VDC regulated (10 to 15 V)
Consumption: 40 mA @ 12 V
Mating: Binder / Coninvers type RC
Overvoltage Protection: All pins are protected

Connector Pin Configuration

Pin 1-2, 3-4, 5-6: Signal output for axis X, Y, Z
Pin 7-8: Test input, Digital test-pulse (0 – 12 V)
Pin 9-10: +12 VDC Power Supply
Pin 11-12: Auxiliary input
Case: Shielded Ground

Environment/Housing

Housing Type: Cast aluminium
Sealed access cover
Housing Size: 195 x 112 x 96 mm
Weight: 2.5 kg
Index of Protection: IP 65
optional IP 68
Temperature Range: - 20 to 70 $^{\circ}$ C (operating)
- 40 to 90 $^{\circ}$ C (non-operating)
Humidity: 0 to 100 % (non-condensing)
Orientation: Floor or wall mounting (to be specified in order)
Mounting: Single bolt, surface mount, adjustable within $\pm 10^{\circ}$

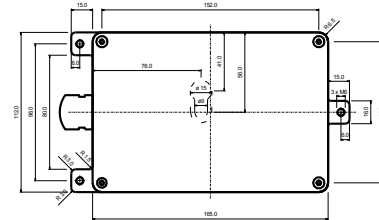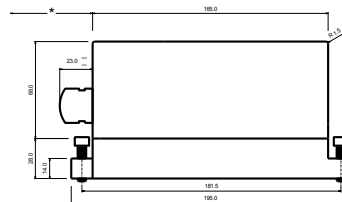

* Minimum Space Allowance for the Connector and Cable:
Sensor with Connector: 300 mm from sensor housing
Sensor with Cable Inlet: 300 mm from sensor housing

Standard AC-23

Floor mounted, Full scale ± 2 g,
2 m cable with cable inlet and recorder
mating connector, concrete anchor bolt
and user manual on CD

Options

Cable & connector:

Cable connector
Metallic, Shielded, IP67, 12 pins, male
optional MIL, Bendix PT07A 14-19P
Cable with shielded twisted pairs for any
length (including mating sensor
connector) with open end
Cables for connection to GeoSIG
recorder

Connector on user specification mounted
at cable end

Housing:
Watertight IP 68 housing
Downhole housing (AC-2x-DH)
Stainless steel protective housing
As internal sensor

Mounting: Wall mounted

Ordering Information

Specify: Type of AC-2x, full scale range, and
other applicable options