


Vented Cable (Drain Wire) 8.2mm

Geosense Part No
Type

Q10-030
920/T/04/220/PUR/BU/8.2

Specifications

Conductor	
Material	Stranded Tinned Copper
Conductor No	4
Construction	Twisted Pair 2x2
Stranding	7 x 0.25mm
Section	22 AWG (0.34mm ²)
Insulation	
Diameter	1.3mm
Material	Polypropylene
Colour	P1=Red, Black, P2=White, Green
Shielding	
In pairs	Aluminium/Mylar tape
Jacket	
Diameter	8.20mm ±0.20
Material	Polyurethane
Colour	Blue
Hardness	85 ShA
Technical	
Rated Temperature	-40 to +80°C
Minimum Bend Radius	? x diameter
Voltage Rating	300V
Voltage Rating Test	1500Vrms x 1 min
Conductor Resistance	48 Ω/km
Compliance	
RoHS 2	2011/65/EU
Copper Standard	EN 13602-ETP1, DIN 40500 E-Cu 58
Oil Resistant	EN 50363-10-2
Additional Information	
Drain Wire	7 x 0.20mm STC
Air Tube	TPU 2.5mm (ID) x 4.0mm (OD)

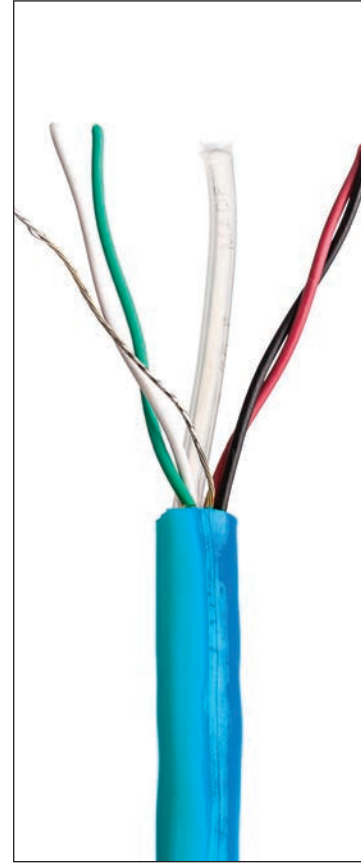

Usage guide

~ VW Piezometer, Vented



Specifications may change without prior notice

Nova House, Rougham Industrial Estate, Rougham, Bury St Edmunds, Suffolk IP30 9ND, England
www.geosense.co.uk e info@geosense.co.uk t +44(0)1359 270457 f +44(0)1359 272860